



GXS5001


5000 Watt Portable Generator

- **Performance Series Engine:** 223cc OHV engine with Cast Iron Sleeve & Low Oil Shutdown
- **High Output:** 5,000 starting watts - 4,000 running watts
- **Run Time:** 6.3-gallon fuel tank for extended run time of up to 20 hours at 25% load
- **Digital Data Center:** Displays voltage, frequency and hours
- **Rubber Outlet Covers:** Help guard against moisture, dust, and debris
- **Heavy Duty Frame Construction:** Built tough with durable automotive style finish
- **Portable Design:** Easy to transport with folding handle and wheels - *included*
- **CO Sensor With Auto Shutdown:** Monitors and reacts to carbon monoxide (CO) levels



GXS5001

Multi-Features Panel with
Outlet Covers

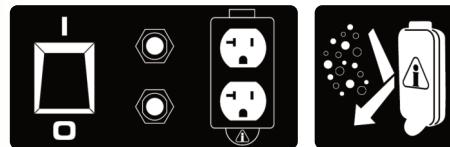

Heavy Duty
Frame



6.3 Gal Tank Built-In Gauge
& Up To 20 Hour Runtime



Folding Handle
Factory Installed



Brushed Alternator
With AVR



Recoil Start
223cc Engine



9.0" Flat
Free Wheel




GXS5001

AC Outlets: 120VAC
5-20R 20A Duplex



AC Outlets: 120VAC
5-20R 20A Duplex



Data Center Displays:
Voltage, Frequency,
Hours

VOLTS - HZ - HOUR
8888

CO Sensor:
Auto Shutdown



Low Oil
Warning



EZ Start System:
Run/Start/Stop



L5-30R:
120VAC 30A



TT-30R:
120VAC 30A



GXS5001 PORTABLE GENERATOR

Starting/Running Watts (Gas)	5000 / 4000W
Starting/Running Watts (Propane)	NA
Starting/Running Watts (NG)	NA
Certifications	EPA
CO Monitor	Yes
AC Voltage	120V
Rated Speed/Frequency	3600rpm/60Hz
Total Harmonic Distortion (THD)	Standard
Grounding System	Neutral Floating
Noise Level (dB)	As Low As 68
Engine Type	Single Cylinder 223cc - 4 Stroke OHV
Starting System	Recoil Start
Low Oil Shutdown	Yes
Cast Iron Sleeve	Yes
Fuel Type	Gasoline
Oil Type and Capacity	10W-30 - 550ml
Alternator Type	Brushed with AVR
Tank (Gas)	6.3 Gal / 23.8 L
Runtime @25% Load (Gas)	Up to 20 Hour
Handle	Folding U Shape
Wheel	Flat Free 9.0"
AC Outlets	2x5-20R Duplex (20A, 120V) - 1xL5-30R (30A, 120V) 1xTT-30R (30A, 120V)
DC Outlets	NA
Voltage Selector Switch	NA
Data Center	Yes; Voltage (V), Frequency (Hz), Total Run Time (Hour)
Included	Oil, Owner's Manual, Quick Start Guide, Spark Plug Wrench, Tool Kit, Flexible Screw-on Funnel
Warranty (Residential)	3 Year
Unit LxWxH (inch / cm)	23.6 x 24.0 x 24.0 inch / 59.9 x 60.9 x 60.9 cm
Carton LxWxH (inch / cm)	24.4 x 19.7 x 22.0 inch / 62.0 x 50.0 x 56.0 cm
Unit Weight (lbs / kg)	111.6 lbs / 50.6 kg
Shipping Weight (lbs / kg)	120.2 lbs / 54.5 kg
UPC	850055834309

GXS5001

GXS5001



Inclusions



iPOWER

www.a-ipower.com
10887 Commerce Way, Unit A
Fontana CA 92337- 8240

Phone: 855-888-3598
Fax: 909-930-3719
support@a-ipower.com
Mon-Fri 8:00 AM to 4:30 PM PST

