




# GXS6400DC

## 6400 Watt Dual Fuel Generator

- **Performance Series Engine:** 274cc OHV engine with Cast Iron Sleeve & Low Oil Shutdown
- **High Output:** 6,400 starting watts - 5,100 running watts on gasoline; 5,800 starting watts - 4,600 running watts on propane
- **Run Time:** 6.3-gallon fuel tank for extended run time of up to 19 hours at 25% load
- **Digital Data Center:** Displays voltage, frequency and hours
- **Rubber Outlet Covers:** Help guard against moisture, dust, and debris
- **Heavy Duty Frame Construction:** Built tough with durable automotive style finish
- **Portable Design:** Easy to transport with folding handle and wheels - included
- **Dual Fuel:** Runs on gasoline or propane fuel giving you flexibility while out on the road or during an emergency
- **CO Sensor With Auto Shutdown:** Monitors and reacts to carbon monoxide (CO) levels




ALL NEW  
**2.23**



# GXS6400DC

**Data Center Displays;**  
Voltage, Frequency, Hours




**5VDC Outlets (2):**  
USB-A 3.6A  
USB-C 3.0A



**TT-30R:**  
120VAC 30A




**AC Outlet: 120VAC**  
5-20R 20A Duplex



**L5-30R:**  
120VAC 30A




**CO Sensor:**  
Auto Shutdown

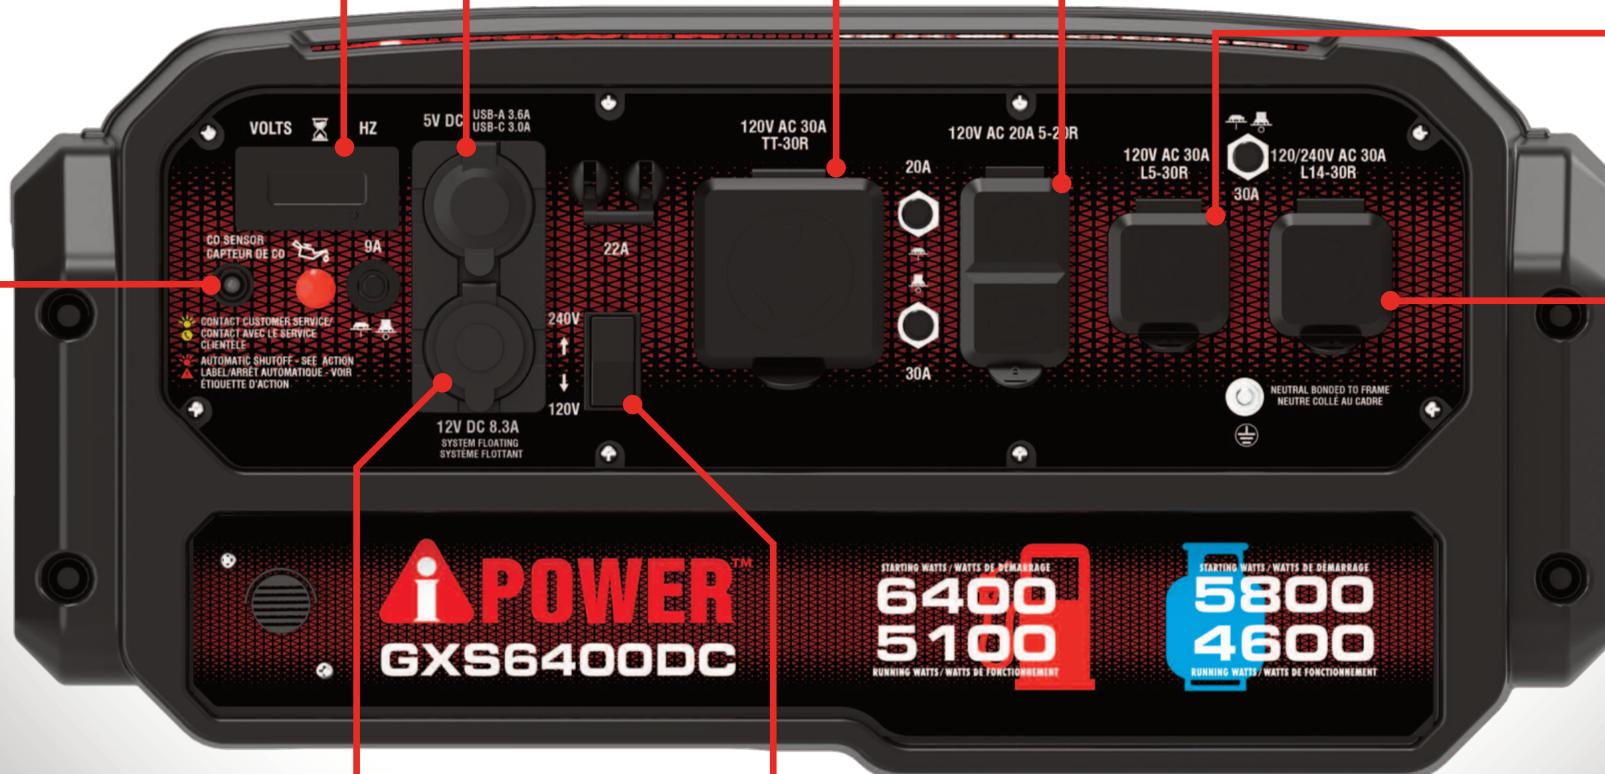

**DC Outlet:**  
8.3A, 12VDC  
Automotive Outlet



**AC Voltage Switch:**  
120  $\longleftrightarrow$  240V




**L14-30R:**  
120/240VAC 30A



## GXS6400DC DUAL FUEL PORTABLE GENERATOR

# GXS6400DC

Starting/Running Watts (Gas)	6400/5100W
Starting/Running Watts (Propane)	5800/4600W
Starting/Running Watts (NG)	NA
Certifications	EPA - cETL Compliant
CO Monitor	Yes
AC Voltage	120/240V
Rated Speed/Frequency	3600rpm/60Hz
Total Harmonic Distortion (THD)	Standard
Grounding System	Neutral Bonded to Frame
Noise Level (dB)	72
Engine Type	Single Cylinder 274cc - 4 Stroke OHV
Starting System	Recoil Start
Low Oil Shutdown	Yes
Cast Iron Sleeve	Yes
Fuel Type	Gasoline - Propane
Oil Type and Capacity	10W-30 - 700ml
Alternator Type	Brushed with AVR
Tank (Gas)	6.3 Gal / 23.8 L
Runtime @25% Load (Gas)	Up to 15 Hour
Handle	Folding U Shape
Wheel	Flat Free 9.0"
AC Outlets	1x5-20R Duplex (20A, 120V) - 1xL5-30R (30A, 120V) 1xTT-30R (30A, 120V) - 1xL14-30R (30A, 120/240V)
DC Outlets	1x8.3A (12VDC) Automotive Outlet 2xUSB (5VDC); USB-A 3.6A, USB-C 3.0A
Voltage Selector Switch	Yes
Digital data Center	Yes; Voltage (V), Frequency (Hz), Total Run Time (Hour)
Included	Oil, Owner's Manual, Quick Start Guide, Spark Plug Wrench, Tool Kit, Flexible Screw-on Funnel, 12V DC Battery Charging Cable, Propane/LPG Hose with Regulator
Warranty (Residential)	3 Year
Carton LxWxH (in / cm)	24.8 x 19.7 x 22.0 in / 63.0 x 50.0 x 56.0 cm
Unit Weight (lbs / kg)	138.8 lbs / 62.9 kg
Shipping Weight (lbs / kg)	145.1 lbs / 65.8 kg
UPC	850016881915

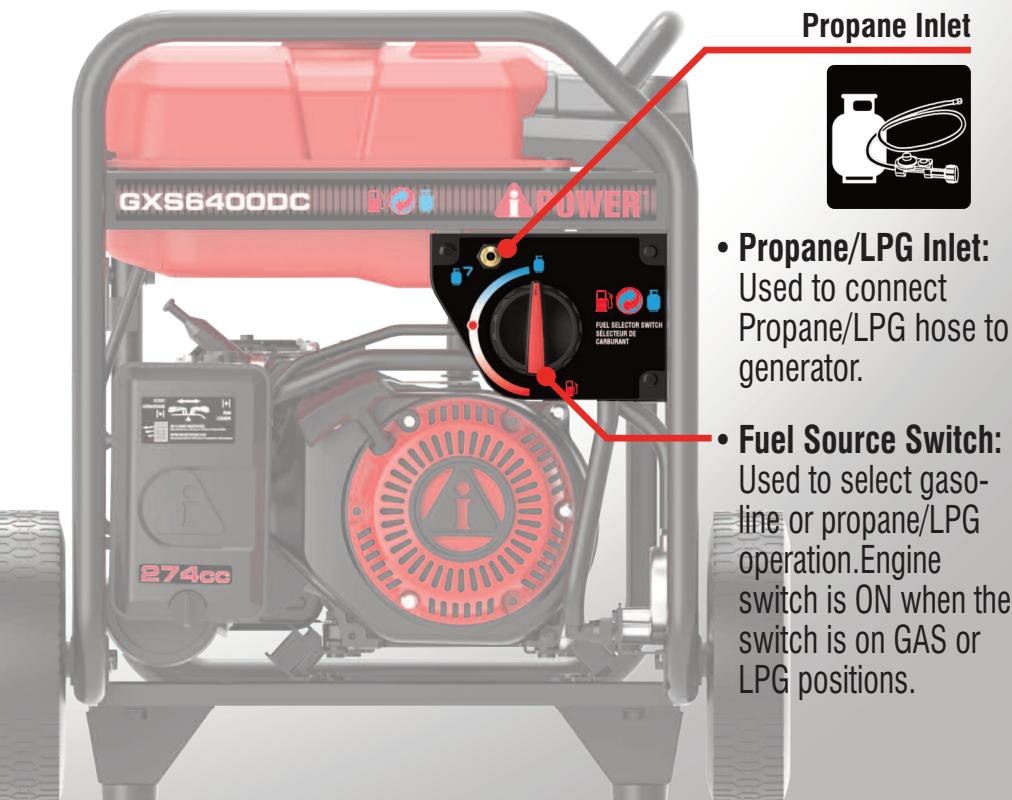

**• Propane/LPG Inlet:** Used to connect Propane/LPG hose to generator.

**• Fuel Source Switch:** Used to select gasoline or propane/LPG operation. Engine switch is ON when the switch is on GAS or LPG positions.

**i** **POWER**

[www.a-ipower.com](http://www.a-ipower.com)

10887 Commerce Way, Unit A  
Fontana CA 92337- 8240

Phone: 855-888-3598

Fax: 909-930-3719

[support@a-ipower.com](mailto:support@a-ipower.com)

Mon-Fri 8:00 AM to 4:30 PM PST

