



# GXS4900RC

4900 Watt Generator  
Remote Control

- **Performance Series Engine:** 223cc OHV engine with Cast Iron Sleeve & Low Oil Shutdown
- **High Output:** 4,900 starting watts - 3,900 running watts
- **Run Time:** 6.3-gallon fuel tank for extended run time of up to 20 hours at 25% load
- **Digital Data Center:** Displays voltage, frequency and hours
- **Rubber Outlet Covers:** Help guard against moisture, dust, and debris
- **Heavy Duty Frame Construction:** Built tough with durable automotive style finish
- **Portable Design:** Easy to transport with folding handle and wheels - *included*
- **Storage:** Convenient, built in on-board storage
- **CO Sensor With Auto Shutdown:** Monitors and reacts to carbon monoxide (CO) levels
- **Simple Starting:** Recoil, electric and remote start - *battery included*



# GXS4900RC

Multi-Features Panel with  
Outlet Covers



Heavy Duty  
Frame



Electric, Recoil &  
Remote Start  
223cc Engine



6.3 Gal Tank Built-In Gauge  
& Up To 20 Hour Runtime



Folding Handle  
Factory Installed



Brushed Alternator  
With AVR



9.0" Flat  
Free Wheel




# GXS4900RC

Data Center Displays;  
Voltage, Frequency,  
Hours




AC Outlets: (2) 120VAC  
5-20R 20A Duplex



TT-30R:  
120VAC 30A




Push Button  
Engine Starting



Remote  
Start




CO Sensor:  
Auto Shutdown

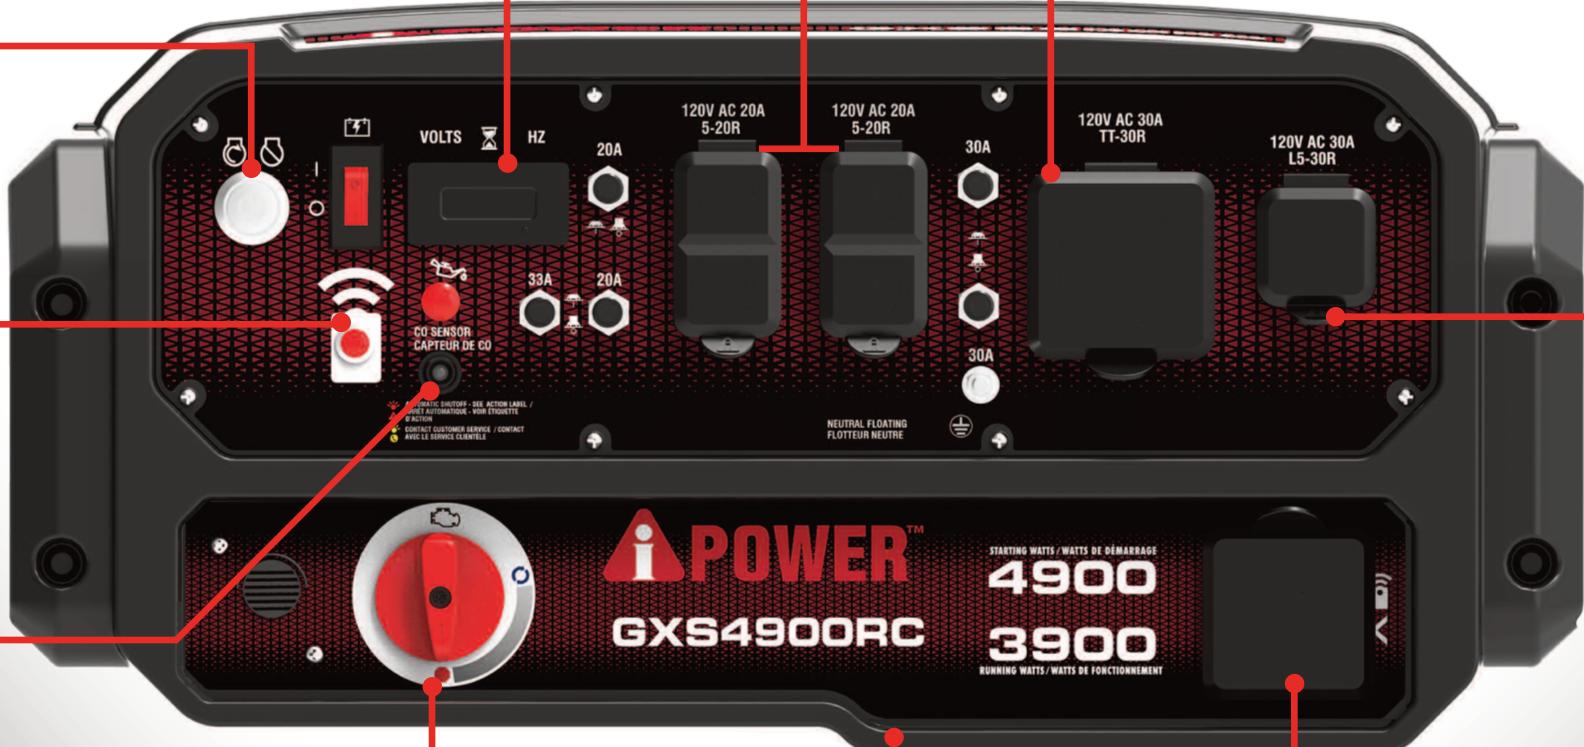

EZ Start System:  
Run/Start/Stop



AC Outlets: (2) 5-20R  
Duplex 20A, 120V



Remote  
Storage




## GXS4900RC REMOTE CONTROL PORTABLE GENERATOR

Starting/Running Watts (Gas)	4900 / 3900W
Starting/Running Watts (Propane)	NA
Starting/Running Watts (NG)	NA
Certifications	EPA - cETL Compliant
CO Monitor	Yes
AC Voltage	120V
Rated Speed/Frequency	3600rpm / 60Hz
Total Harmonic Distortion (THD)	Standard
Grounding System	Neutral Floating
Noise Level (dB)	As Low As 68
Engine Type	Single Cylinder 223cc - 4 Stroke OHV
Starting System	Recoil Start - Electric Start - Remote Start (Battery & FOB Included)
Low Oil Shutdown	Yes
Cast Iron Sleeve	Yes
Fuel Type	Gasoline
Oil Type and Capacity	10W-30 - 550ml
Alternator Type	Brushed with AVR
Tank (Gas)	6.3 Gal / 23.8 L
Runtime @25% Load (Gas)	Up to 20 Hour
Handle	Folding U Shape
Wheel	Flat Free 9.0"
AC Outlets	2x5-20R Duplex (20A, 120V) - 1xL5-30R (30A, 120V) 1xTT-30R (30A, 120V)
DC Outlets	NA
Voltage Selector Switch	NA
Data Center	Yes; Voltage (V), Frequency (Hz), Total Run Time(Hour)
Included	Oil Bottle, Owner's Manual, Quick Start Guide, Spark Plug Wrench, Tool Kit, Flexible Screw-on Funnel, Remote Control Fob
Warranty (Residential)	3 Year
Unit LxWxH (inch / cm)	23.6 x 24.0 x 24.0 inch / 59.9 x 60.9 x 60.9 cm
Carton LxWxH (inch / cm)	24.4 x 19.7 x 22.0 inch / 62.0 x 50.0 x 56.0 cm
Unit Weight (lbs / kg)	119.8 lbs / 54.3 kg
Shipping Weight (lbs / kg)	126.5 lbs / 57.4 kg
UPC	850016881908

# GXS4900RC

## Inclusions

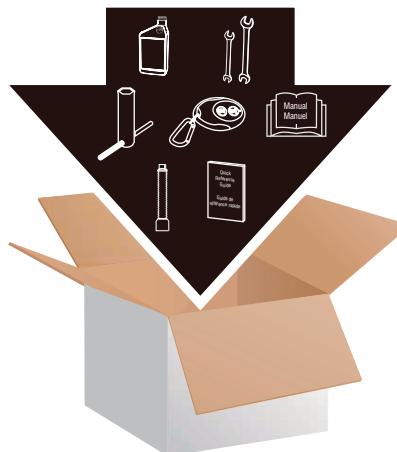

**i** **POWER**

[www.a-ipower.com](http://www.a-ipower.com)  
10887 Commerce Way, Unit A  
Fontana CA 92337- 8240

Phone: 855-888-3598  
Fax: 909-930-3719  
[support@a-ipower.com](mailto:support@a-ipower.com)  
Mon-Fri 7:30 AM to 5:30 PM CT

