


- **Performance Series Engine:**
223cc OHV engine with Cast Iron Sleeve & Low Oil Shutdown
- **High Output:** 5,000 starting watts - 4,250 running watts
- **Run Time:** 4-gallon fuel tank for extended run time of 13 hrs. at 25% load
- **Voltage Selector Switch:** Toggle between 120V or 240V based on user needs
- **Rubber Outlet Covers:** Help guard against moisture, dust, and debris
- **Heavy Duty Frame Construction:**
Built tough with durable powdercoat finish
- **Portable Design:** Easy to transport with folding handle and wheels



SUA5000C

Multi-Features Panel with
Outlet Covers

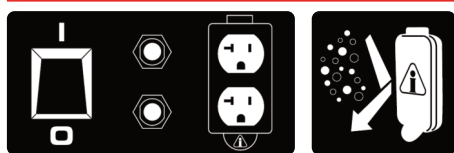

Heavy Duty
Frame



4.0 Gal Tank Built-In Gauge
13 Hour Runtime



Folding
Handle



Brushed Alternator
With AVR



Recoil Start 223cc
Engine



7.0" Flat
Free Wheel



SUA5000C


Engine Switch



Hour Meter



L14-30R
30A, 120/240V

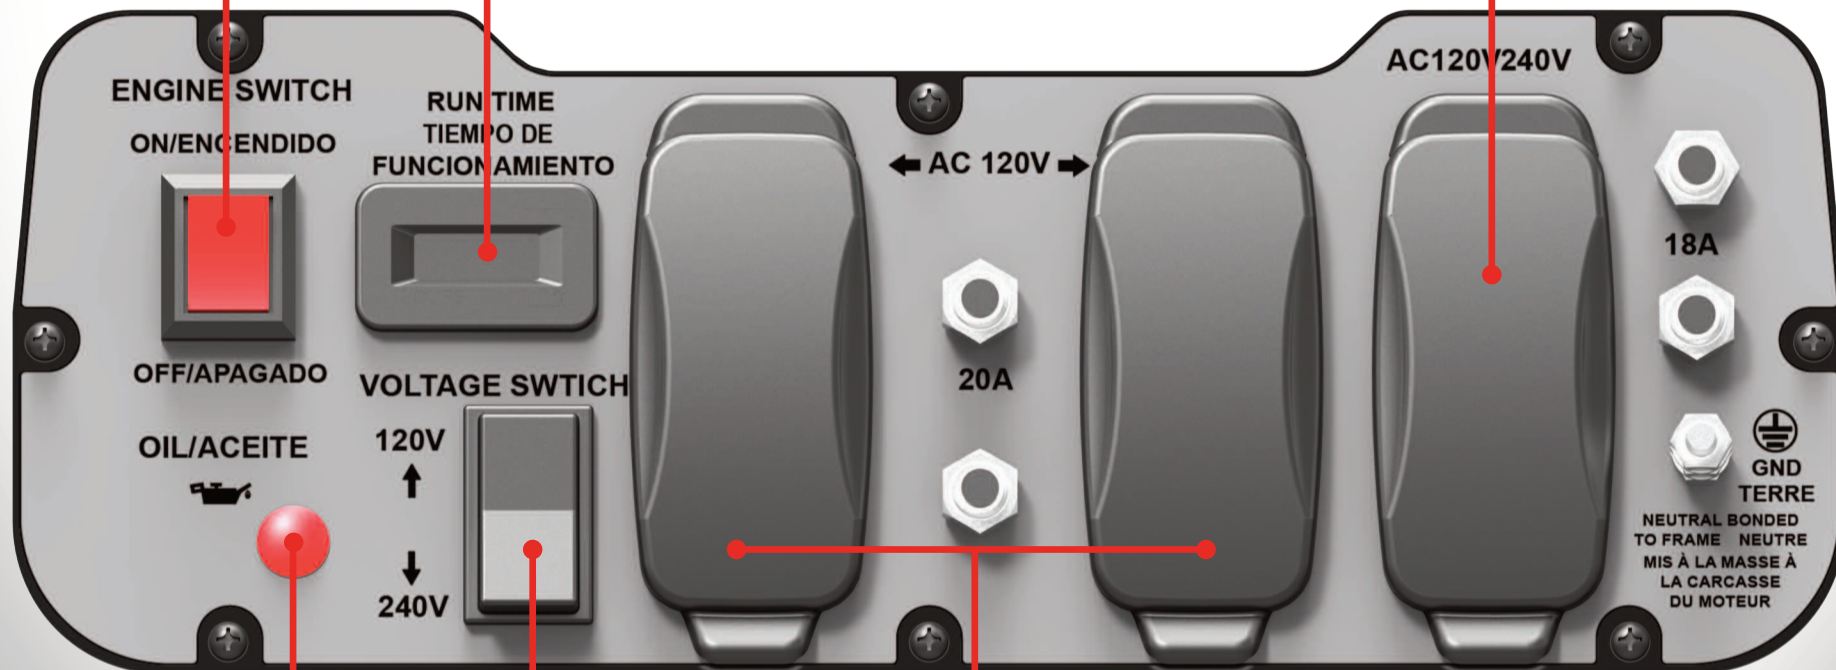


Low Oil Indicator



120V~240V Voltage
Selector Switch






2x5-20R
Duplex 20A, 120V



SUA5000C

Model Number	SUA5000C
Starting/Running Watts	5000/4250W
Certifications	EPA - CARB
AC Voltage	120/240V
Rated Speed/Frequency	3600rpm/60Hz
Total Harmonic Distortion (THD)	Standard
Grounding System	Neutral Bonded to Frame
Noise Level (dB)	68
Engine Type	Single Cylinder 223cc - 4 Stroke OHV
Starting System	Recoil Start
Low Oil Shtdown	Yes
Cast Iron Sleeve	Yes
Fuel Type	Gasoline
Oil Type and Capacity	10W-30 - 550ml
Alternator Type	Brushed with AVR
Tank	4.0 Gal
Runtime @25% Load	13 Hour
Handle	Folding U Shape
Wheel	Flat Free 7.0"
AC Outlets	2x5-20R Duplex (20A, 120V) - 1xL14-30R (30A, 120/240V)
Voltage Selector Switch	Yes
Hour Meter	Yes
Included	Oil - Tool Kit - Manual - QSG
Warranty (Residential)	2 year
Carton LxWxH	24.6x18.3x19.9 inch
Unit Weight	118.9 lbs
Shipping Weight	130.0 lbs
UPC	851217006084

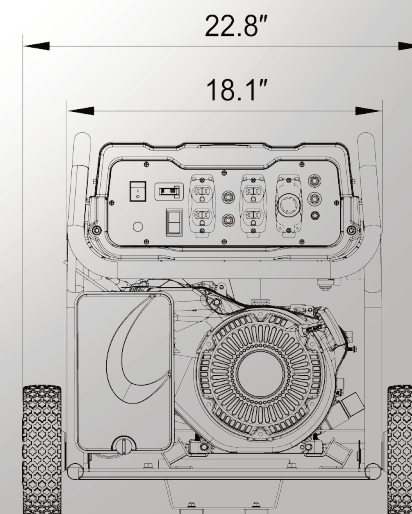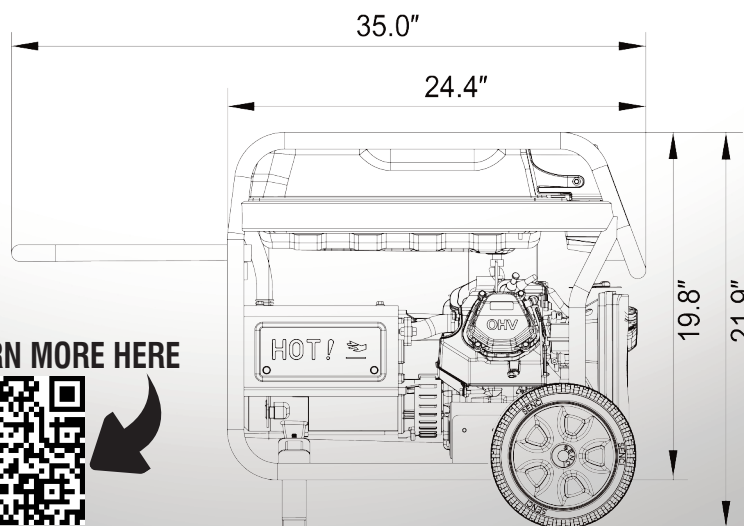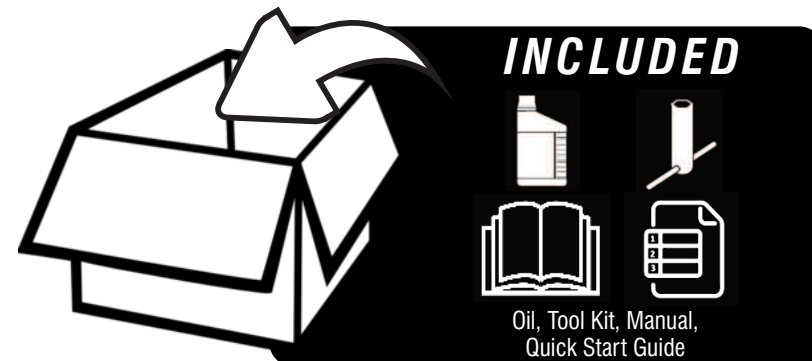

LEARN MORE HERE



www.a-ipower.com
10887 Commerce Way, Unit A
Fontana CA 92337- 8240

Phone: 855-888-3598
Fax: 909-930-3719
support@a-ipower.com
Mon-Fri 8:00 AM to 4:30 PM PST

